



**LATERAL REPAIRS**  
MANUFACTURING PERFECTION

# LATERAL REPAIRS PRICE LIST 2025

---

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>Lateral Repairs LR Drain+ Liner PUR</b>                                 | <b>3</b>  |
| <b>Lateral Repairs Nanotech</b>                                            | <b>4</b>  |
| <b>Lateral Repairs MegaLiner</b>                                           | <b>5</b>  |
| <b>Calibration hose. “Light Duty”</b>                                      | <b>6</b>  |
| <b>Calibration hose. “Heavy Duty” orange,combi/transparent</b>             | <b>7</b>  |
| <b>Preliner</b>                                                            | <b>8</b>  |
| <b>Lateral Repairs Epoxy Resin Systems. Epoxy resin (A) + Hardener (B)</b> | <b>9</b>  |
| <b>Mega+</b>                                                               | <b>10</b> |
| <b>UV led resin</b>                                                        | <b>11</b> |
| <b>SILICATE SYSTEMS</b>                                                    | <b>12</b> |
| <b>Glass Fiber composite</b>                                               | <b>13</b> |

## Lateral Repairs LR Drain+ Liner PUR

**For vertical and horizontal pipelines, also with bends up to 90°.**

Specially designed to restore pipe sections with varying diameters.

**Diameter from DN 50 to DN 250.**

Ideal for curing in the environment without additional equipment.


Hot curing is possible using a calibration hose.

Suitable for UV-LED light - drying.

Very flexible, easy to handle and process material.

Easy restoration after curing.

Packed in 100-meter cardboard boxes or 50 meter rolls.

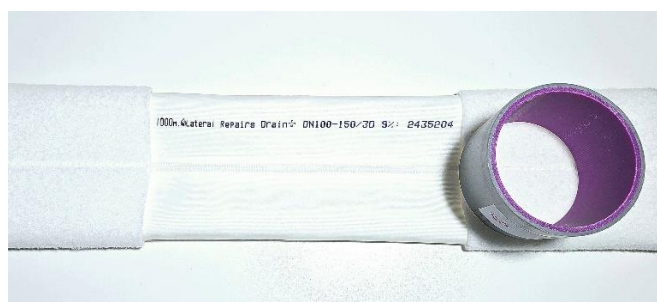

### Drain + Liner PUR with 18% undersize 2D

| Item No  | Description  | Price/mtr |
|----------|--------------|-----------|
| LRP3018  | DN30(18%)2D  | 16.99 €   |
| LRP4018  | DN40(18%)2D  | 16.99 €   |
| LRP5018  | DN50(18%)2D  | 16.99 €   |
| LRP6518  | DN65(18%)2D  | 19.80 €   |
| LRP7018  | DN70(18%)2D  | 19.99 €   |
| LRP10018 | DN100(18%)2D | 23.50 €   |
| LRP12518 | DN125(18%)2D | 27.99 €   |
| LRP15018 | DN150(18%)2D | 30.99 €   |
| LRP17518 | DN175(18%)2D | 37.50 €   |
| LRP20018 | DN200(18%)2D | 38.99 €   |

### DRAIN + Liner PUR with 9 % undersize 3D

| Item No | Description | Price/mtr |
|---------|-------------|-----------|
| LRP309  | DN 30 (9%)  | 16,99 €   |
| LRP509  | DN 50 (9%)  | 16,99 €   |
| LRP659  | DN 65 (9%)  | 18,88 €   |
| LRP709  | DN 70 (9%)  | 19,99 €   |
| LRP1009 | DN100(9%)   | 23,99 €   |
| LRP1259 | DN 125(9%)  | 27,99 €   |
| LRP1509 | DN 150 (9%) | 30,99 €   |
| LRP2009 | DN 200 (9%) | 39,99 €   |

### LR DRAIN+Liner PUR with 5 % undersize

| Item No | Description | Price/mtr |
|---------|-------------|-----------|
| LRP505  | DN 50 (5%)  | 16,99 €   |
| LRP705  | DN 70 (5%)  | 21,50 €   |

## Lateral Repairs Nanotech

**For pipes and sewers from DN 70 to DN 250.**

For vertical and horizontal pipelines, also with bends up to 90° without large wrinkles.

For pipes with dimension changes up to 2 nominal widths.

**No additional calibration hose required.**

Accurately calculated longitudinal expansion.

Hot curing possible with addition of calibration hose.

Ideal for curing at ambient temperature.

Packed in 100-meter cardboard boxes.



### Lateral Repairs Nanotech 4,5 mm Liner 3D

| Item No  | Description     | Price/mtr |
|----------|-----------------|-----------|
| LRN7045  | DN 70 -100 3D   | 22,50 €   |
| LRN10045 | DN 100 - 150 3D | 25,80 €   |
| LRN15045 | DN 150 - 200 3D | 32,50 €   |
| LRN20045 | DN 200 - 250 3D | 34.13 €   |

### Lateral Repairs Nanotech 4 mm Liner 3D

| Item No  | Description     | Price/mtr |
|----------|-----------------|-----------|
| LRN7040  | DN 70 -100 3D   | 22,50 €   |
| LRN10040 | DN 100 - 150 3D | 25,80 €   |
| LRN15040 | DN 150 - 200 3D | 32,50 €   |

## Lateral Repairs MegaLiner

Easy-to-use PP-coated liner Low-pressure installation.

**For diameters from DN 100 to DN 300 (4" - 12").**

Maximum coating elasticity.

**Designed for bends up to 45 degrees.**

Perfect impregnation properties.

Choice of wall thickness.

**Various curing methods.**

Packed in 100-meter long cardboard boxes.



## Lateral Repairs MegaLiner

| Item No  | Description   | Price/mtr |
|----------|---------------|-----------|
| LRM10030 | DN 100 3.0 mm | 15,10 €   |
| LRM15030 | DN 150 3.0 mm | 17,50 €   |
| LRM15045 | DN 150 4.5mm  | 19,10 €   |
| LRM20030 | DN 200 3.0 mm | 23,50 €   |
| LRM20045 | DN 200 4.5 mm | 24,80 €   |
| LRM22530 | DN 225 3.0 mm | 25,99 €   |
| LRM22545 | DN 225 4.5 mm | 26,50 €   |
| LRM25030 | DN 250 3.0 mm | 27,99 €   |
| LRM25045 | DN 250 4.5 mm | 29,50 €   |
| LRM30030 | DN 300 3.0mm  | 30,99 €   |
| LRM30045 | DN 300 4.5 mm | 32,50 €   |

## Calibration hose. "Light Duty"

**Available in diameters from DN 50 to 200**

Ideal for ambient-curing resins

Perfect for lateral connections

**Performing bends up to 90°**

**Heat resistance: max. 60 °C**

**Installation pressure: max. 0,5 bar**



### Calibration Hose "Light Duty" violet

| Item   | Description | Price/mtr |
|--------|-------------|-----------|
| 15164  | DN 64       | 5,73 €    |
| 15175  | DN 75       | 6,49 €    |
| 151100 | DN 100      | 7,49 €    |
| 151125 | DN 125      | 7,85 €    |
| 151150 | DN 150      | 8,26 €    |
| 151200 | DN 200      | 10,55 €   |

## Calibration hose. "Heavy Duty" orange,combi/transparent

Available in diameters from DN 100 to 300

Ideal for hot water or steam curing

For main lines and house lining

Performing bends up to 90°

**High temperature resistant:**

80 °C water / 100 °C steam

**Can also be used as liner end cap**

**UV-LED curing possible with transparent calibration hose**



### Calibration Hose "Heavy Duty"

| Item No Orange/Transparent | Description | Price/mtr |
|----------------------------|-------------|-----------|
| 153100/820100              | DN 100      | 8,80 €    |
| 153125/820125              | DN 125      | 9,99 €    |
| 153150/820150              | DN 150      | 11,87 €   |
| 153200/820200              | DN 200      | 16,05 €   |
| 153225/820225              | DN 225      | 16,99 €   |
| 153250/820250              | DN 250      | 19,45 €   |
| 153300/820300              | DN 300      | 22,99 €   |


## Preliner

Excellent strength properties, and good leakage and puncture resistance

**Preliner protects the liner with epoxy from water infiltration and sharp edges.**

**Always use Preliner in the concrete and clay pipes to prevent any damage caused by the water coming outside the pipe.**

The use of the Preliner reduces the risk of liner breakage in plastic sewer lines.

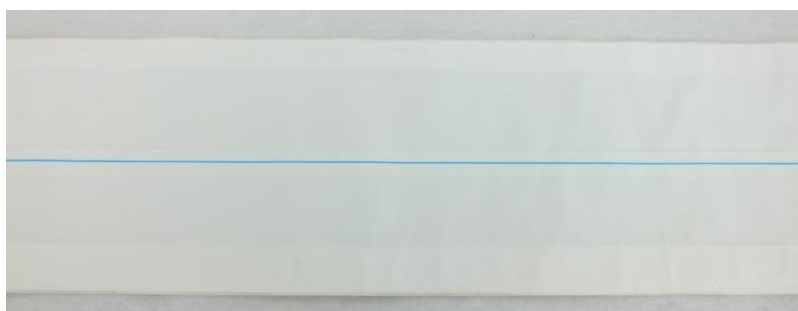

### Preliner

| Item No | Description    | Price/mtr |
|---------|----------------|-----------|
| DN100   | DN 100 (180mm) | 2,88 €    |
| DN125   | DN 125 (200mm) | 3,23 €    |
| DN150   | DN 150 (260mm) | 3,82 €    |
| DN200   | DN 200 (340mm) | 4,29 €    |
| DN225   | DN 225 (380mm) | 4,79 €    |
| DN250   | DN 250 (420mm) | 5,20 €    |
| DN300   | DN 300 (500mm) | 5,97 €    |
| DN350   | DN 350 (600mm) | 6,30 €    |
| DN400   | DN 400 (650mm) | 6,62 €    |
| DN500   | DN 500 (850mm) | 8,88 €    |

## Lateral Repairs Epoxy Resin Systems. Epoxy resin (A) + Hardener (B)

**Fast Cast FCA (component A) is a two-component epoxy system specially developed for a trouble-free renovation of waste and storm water pipes.**

**Fast Cast FCA is used with hardener Fast Cast 15B or Fast Cast 30B.**

Color: With hardener FC15, violet

Color: With hardener FC30, blue or violet

Storage: Should be stored frost-free (5-25 degrees C.)

Weight: 12.83 kg

**FC15B perfect for smaller pipe diameters and short rehabilitation distances. Well suited for lateral connection repairs with the Lateral Repairs Lining Systems. No curing equipment necessary.**

Potlife: approx. 15 minutes (at 25 degrees C.)

Color: Violet.

Weight: 3.87

Storage: Should be stored frost-free (5-25 degrees C.)

**FC30B Potlife: approx. 30 minutes (at 25 degrees C.)**

Color: Blue or violet



### Epoxy Resin (A) + Hardener (B)

| Item No                      | Description                                | Price/kg |
|------------------------------|--------------------------------------------|----------|
| 107015                       | Fast Cast Resin<br>(FC15-30A Comp) 12,83kg | 15,60 €  |
| 107019                       | Fast Cast Resin<br>(FC15 B Comp) 3,87kg    | 24,10 €  |
| 107010 Blue<br>107011 Violet | Fast Cast Resin<br>(FC30 B Comp) 4,24kg    | 24,50 €  |

## Mega+

Highly recommended for longer rehabilitation lengths and larger pipe diameters up to DN600.

**Mega+ A (component A)** is a two-component epoxy system specially developed for a trouble-free renovation of waste and storm water pipes.

Weight: 16.5

Color with hardener: Blue

Curing time with steam or hot water 90 and 45 minutes, respectively

Storage: Should be stored frost-free (5-25 degrees C.)



**Mega+ B (component B)** is a two-component epoxy system specially developed for a trouble-free renovation of waste and stormwater pipes.

Pottime (25 °C) 120 minutes

Weight: 4.95 kg

Color: Blue

Storage: Should be stored frost-free (5-25 degrees C.)



## Epoxy Resin (A) + Hardener (B)

| Item No | Description           | Price/kg |
|---------|-----------------------|----------|
| 107183  | Mega+ A comp. 16,5 kg | 12,34 €  |
| 107184  | Mega+ B comp. 4,95 kg | 19,41 €  |

## UV led resin

Excellent technical and mechanical properties

Odorless

**Perfect choice for LED curing**

Available in 20kg buckets or 1T IBC



Lateral repairs UV resin

| Item No | Description        | Price/kg |
|---------|--------------------|----------|
| 650011  | UV-Led resin, 20kg | 19,85 €  |
| 650013  | UV IBC 1T          | POA      |

## SILICATE SYSTEMS

Lateral Repairs Silicate Resin are highly chemical and heat resistant, and in case of fire self-extinguishing.

Our products do not contain any volatile organic compounds (VOC) and are completely styrene- free.

We also supply all silicate resins in bulk quantities.

**Resin mixture is made up of two components: a resin (B) and a hardener (A) in a mixing ratio of 2:1 by volume.**

**Type W (Winter) is recommended for use under lower outdoor temperatures.**

**Type A(Summer) is recommended for use under higher outdoor temperatures.**

**Type S (Fast) is recommended for use in subarctic or as an accelerator for Type W and Type A.**

**Type Hardener can be used with all Lateral Repairs Silicate Resin B components.**



### Silicate Resin

| Item No | Description            | Price    |
|---------|------------------------|----------|
| 116802  | Type W (Winter)- 13 kg | 241.82 € |
| 116803  | Type A (Summer)- 13 kg | 241.82 € |
| 234505  | Type S (Fast)- 13 kg   | 241.82 € |
| 116700  | Hardener- Waterglass   | 264.21 € |

## Glass Fibre composite

The chemically resistant, non-corroding (CRF+) Lateral Repairs Glass Fibre Mat CRF+1050 g/m<sup>2</sup> and Lateral Repairs Glass Fibre Mat CRF+ 1400 g/m<sup>2</sup> are used in conjunction with Lateral Repairs Silicate Resin systems to restore the structural stability of the host pipe or replace entire part lengths.

Lateral Repairs spot repair method designed for repairing pipes and joints at lengths of up to 5 meters. We supply either rolls in various widths or ready-cut mats in standard repair sizes.



### Glass fiber

| Item No    | Description                                      | Price   |
|------------|--------------------------------------------------|---------|
| 232352     | Glass Fibre Composite 1050 g/m <sup>2</sup> CRF+ | 11.20 € |
| SP1400g/M2 | Glass Fibre Composite 1400 g/m <sup>2</sup> CRF+ | 13.60 € |
| SP232351   | Biax glass Fibre                                 | 14.20 € |
| 100600WKit | DN100 Patch Repair Kit Winter/Summer             | 65.90 € |
| 150600WKit | DN150 Patch Repair Kit Winter/Summer             | 80.00 € |